



Stationary Tank Unit

Fuelling kits designed to serve as your fixed fuelling station.



Fig. 1 · MATEŞ stationary tank unit. Livery and equipment vary per order.

Tank capacity 10,000-45,000 L	Overwing reel hose up to 350 L/min	Built to NFPA 407 · IATA/JIG · EN 12312-5
----------------------------------	---------------------------------------	--

Specification

A Capacity

Tank capacity	10,000-45,000 L
---------------	-----------------

B Flow rates

Overwing reel hose	up to 350 L/min
--------------------	-----------------

C Compliance

Built to	NFPA 407, IATA/JIG, EN 12312-5
----------	--------------------------------

D Per order

Footprint and dimensions	Confirmed in the quotation
--------------------------	----------------------------

Component makes and models	Confirmed in the quotation
----------------------------	----------------------------

Each unit is configured per order to the customer's operation. Figures are maximums of the product family; the quotation states the values for the configured unit.

Technical drawing

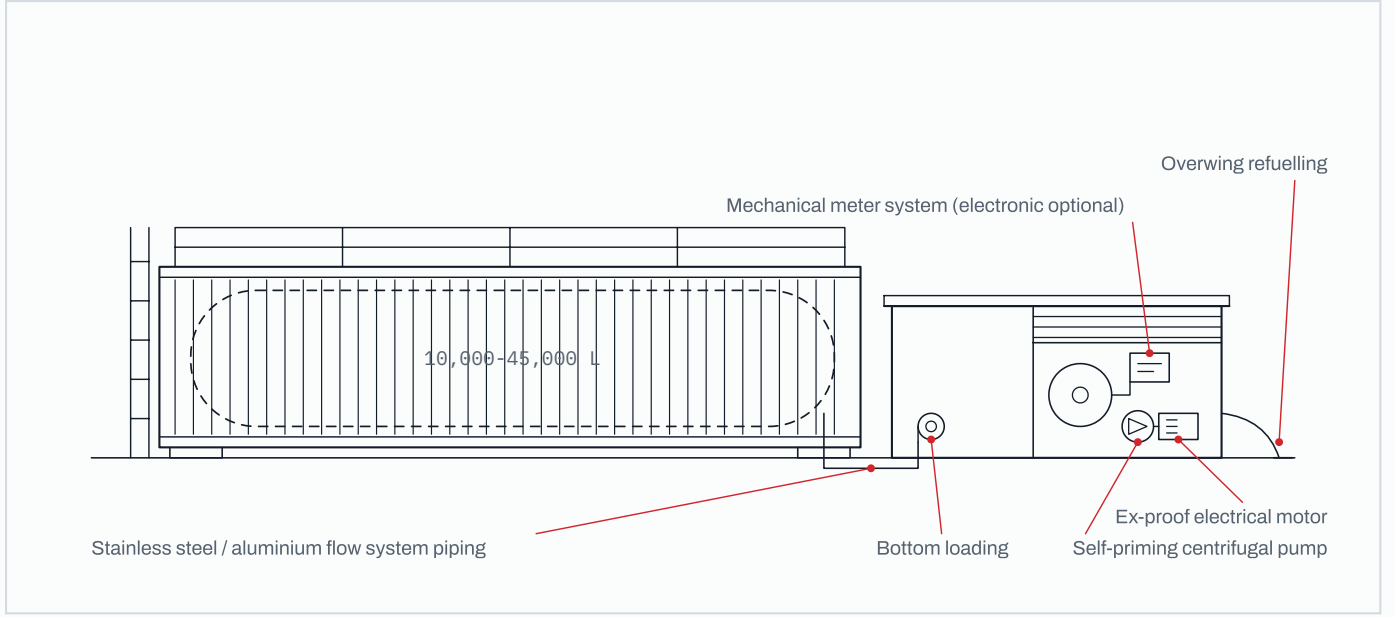


Fig. 2 · Side view, main equipment called out. Not to scale; illustrative of the family.

Equipment

Standard

06

- Overwing refuelling
- Bottom loading
- Self-priming centrifugal pump
- Ex-proof electrical motor
- Mechanical meter system (electronic optional)
- Stainless steel / aluminium flow system piping

Options

04

- ▣ Mechanical drive hose reel
- ▣ Closed-circuit sampling system with recovery tank
- ▣ Defuelling
- ▣ Deadman control